NuTone®

INSTALLATION INSTRUCTIONS
READ & SAVE THESE INSTRUCTIONS!

Ceiling Fan Light Kits

CAUTION: To reduce the risk of fire and electric shock, this light kit should only be used with the PF Series paddle fans manufactured by NuTone.

CAUTION: To reduce the risk of electric shock, disconnect the electrical supply circuit to the fan before installing light kit.

IMPORTANT: Refer to the back of this sheet for important information regarding the installation of the light kit.

1. **Refer to Figure 1 or 2.** Remove screws securing fan switch housing cover. Remove cover.
2. Remove center screw or plug from bottom of switch housing cover.
3. **Refer to Figure 3.** Run light kit wires through center hole on switch housing cover and screw threaded nipple of light kit securely into the housing cover.
4. Remove wire nuts from wires marked for light kit use in switch housing. Connect the white wire from the light kit to the white wire in switch housing. Connect the black wire from the light kit to the colored wire from the switch housing.
5. Secure switch housing cover and fixture to switch housing using screws removed in step 1.
6. Install shades and lamps. Observe maximum wattage listed on the back of this sheet and as marked on the light kit. Restore power and check for proper operation.

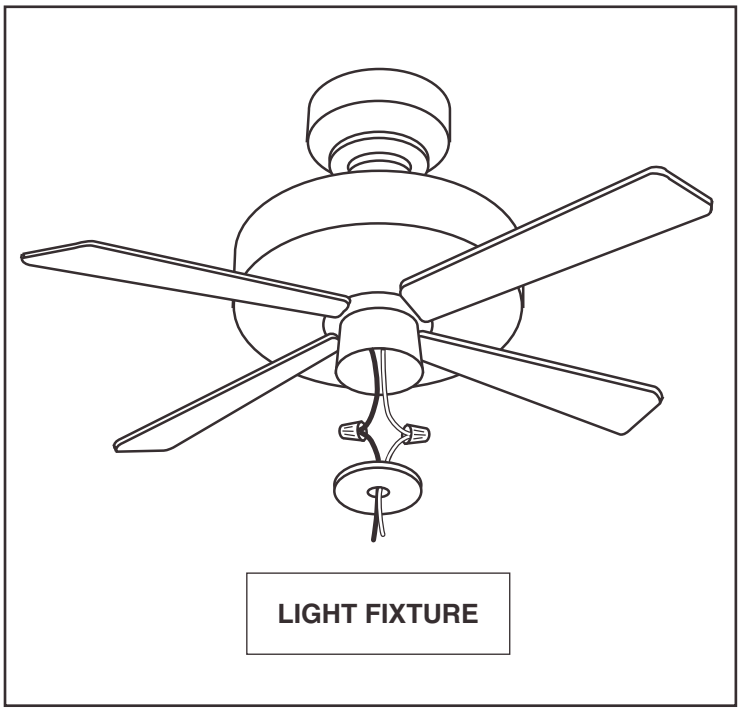

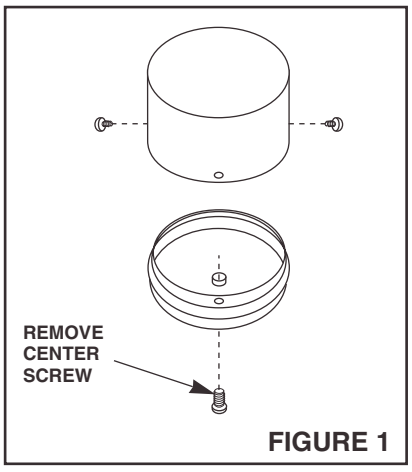

FIGURE 1

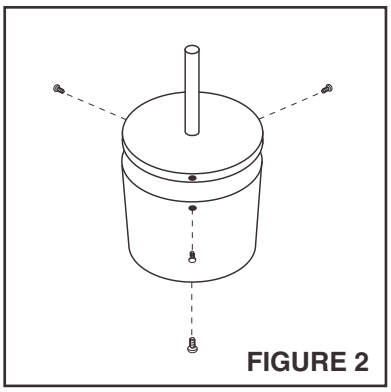
FIGURE 2

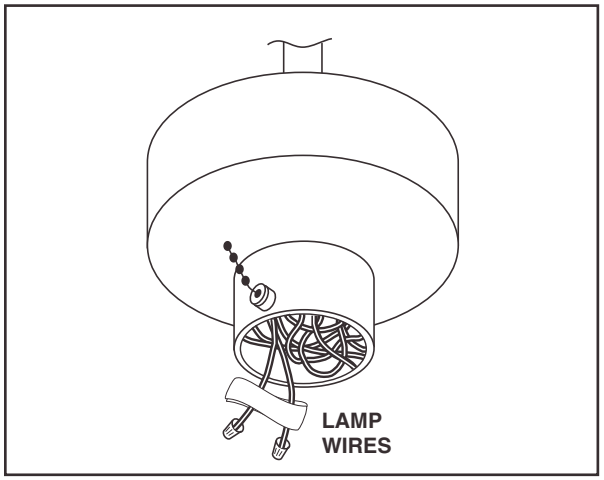

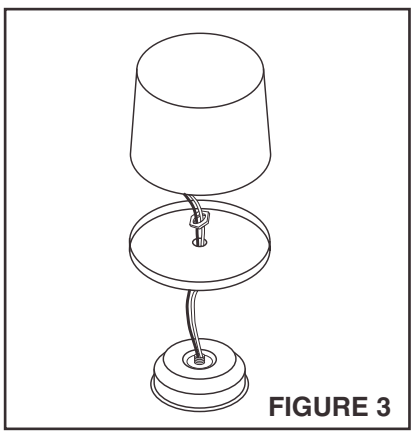
FIGURE 3

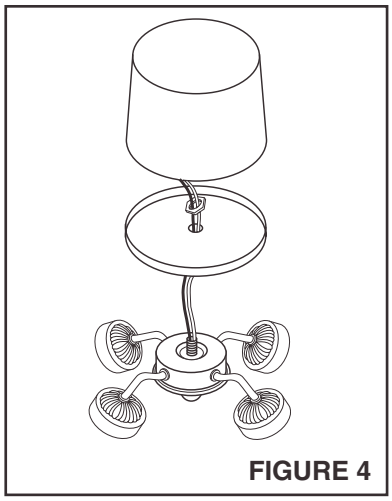
FIGURE 4

(Please see other side.)

If combined weight of light kit and ceiling fan exceeds 35 pounds, fan should be supported independently from the outlet box. Check the following list for the weight of the light kit.

Model Number	Weight	Lamp Rating
PFLK-1	3.8 lbs.	(1) 100 Watt Max.
CGLK-3	6.8 lbs.	(3) 60 Watt Max.
SRLK-4	2.7 lbs.	(4) 60 Watt Max.
RGLK-8	2.5 lbs.	(1) 100 Watt Max.
PFLK101-5	6.0 lbs.	(5) 60 Watt Max.
PFLK102-1	4.0 lbs.	(1) 150 Watt Max. (halogen)
PFLK104-1	5.0 lbs.	(3) 40 Watt Max.
PFLK106-1	4.0 lbs.	(3) 40 Watt Max.
PFLK107-4	4.0 lbs.	(4) 60 Watt Max.
PFLK108-4	4.0 lbs.	(4) 60 Watt Max.
PFLK-115	8.9 lbs.	(4) 60 Watt Max.

Refer to the Ceiling Fan Instruction Sheet for operating instructions.

NuTone®

One Year Limited Warranty

WARRANTY OWNER: NuTone warrants to the original consumer purchaser of its products that such products will be free from defects in materials or workmanship for a period of one (1) year from the date of original purchase. **THERE ARE NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

During this one year period, NuTone will, at its option, repair or replace, without charge, any product or part which is found to be defective under normal use and service. THIS WARRANTY DOES NOT EXTEND TO FLUORESCENT LAMP STARTERS OR TUBES, FILTERS, DUCT, ROOF CAPS, WALL CAPS AND OTHER ACCESSORIES FOR DUCTING. This warranty does not cover (a) normal maintenance and service or (b) any products or parts which have been subject to misuse, negligence, accident, improper maintenance or repair (other than by NuTone), faulty installation or installation contrary to recommended installation instructions.

The duration of any implied warranty is limited to the one year period as specified for the express warranty. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

NUTONE'S OBLIGATION TO REPAIR OR REPLACE, AT NUTONE'S OPTION, SHALL BE THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY UNDER THIS WARRANTY. NUTONE SHALL NOT BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH PRODUCT USE OR PERFORMANCE. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state. This warranty supersedes all prior warranties.

WARRANTY SERVICE: To qualify for warranty service, you must (a) notify NuTone at the address stated below or telephone 1/800-543-8687, (b) give the model number and part identification and (c) describe the nature of any defect in the product or part. At the time of requesting warranty service, you must present evidence of the original purchase date.

Date of Installation _____ Builder or Installer _____

Model No. and Product Description _____

IF YOU NEED ASSISTANCE OR SERVICE:

For the location of your nearest NuTone Independent Authorized Service Center:

Residents of the contiguous United States Dial Free 1-800-543-8687

Please be prepared to provide:

Product model number • Date and Proof of purchase • The nature of the difficulty

Residents of Alaska or Hawaii should write to: NuTone Inc. Attn: Department of National Field Service, 4820 Red Bank Road, Cincinnati Ohio 45227-1599.

Residents of Canada should write to: Broan-NuTone Canada, 1140 Tristar Drive, Mississauga, Ontario, Canada L5T 1H9.

Rev. 03/2001

Product specifications subject to change without notice.

NuTone®

4820 Red Bank Road, Cincinnati, Ohio 45227
Printed in Taiwan, Rev. 03/2002, Part No. 34911